



WINDOWS TECHNOLOGY




UPVC Windows & Doors




**WIN
DOWS**

T-Track employs
Hi-Technology UPVC
window and door
machinery, has the latest
CNC machine in the world

T Track[®]
For Engineering Solutions GMBH 

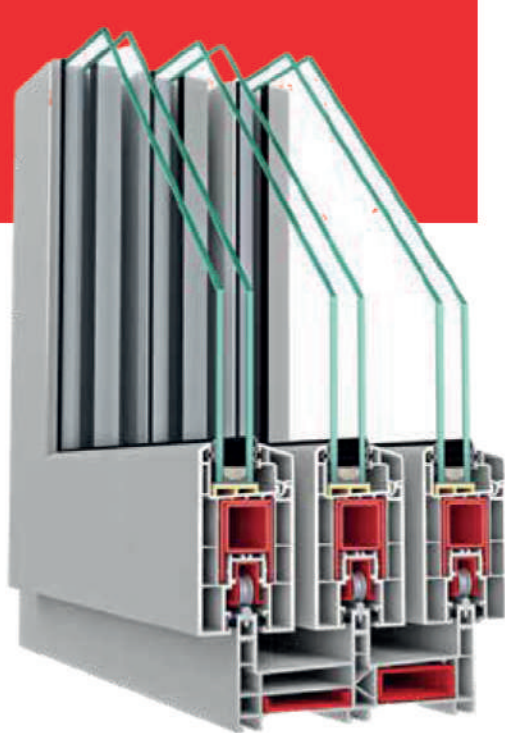

Sliding Three Track double glass

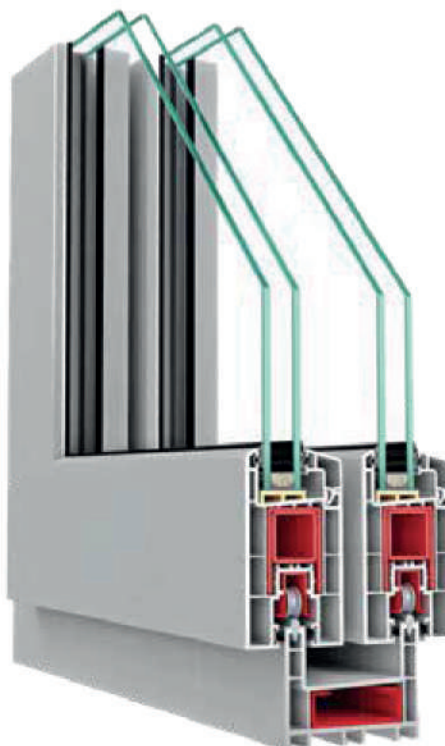

Sliding Two Track Double Glass



Sliding One Track Double Glass

Track Profiles Technical Specs		
Serial	Profile Specs.	Description
A : Turn Profile System:		
1-1	External Wall Thickness	3 - 2.7 mm
2-1	Inner Wall Thickness	1.25 mm - 1.5 mm
3-1	Number of Vertical Chambers	4 Chambers
4-1	Turn System Generation	60 mm
5-1	Turn Frame Dimensions	Width 60 mm - Height 65 mm
6-1	Turn Sash Dimensions	Width 60 mm - Height 116 - 78 mm
7-1	Turn Mullion Dimensions	Width 60 mm - Height 85 mm
8-1	Glass Beads Design	Decorative Beads Support Glass Thickness 24-4 mm
9-1	Glass Beads Gaskets	Built in Gaskets for White & Ivory. External EPDM for Laminated profiles.
10-1	Standard Architrave	Decorative Total 52 mm - Given 45 mm
11-1	Supplementary Profiles	Supported with Full range
12-1	Coupling Profiles	Supported with Full range
13-1	Draining System	Designed & Supported
14-1	Steel reinforcement	Galvanized 1.25 mm - 2 mm
15-1	Gaskets	EPDM - External
16-1	External Alu. Section	Supported
17-1	Profile Heat Transmission	Supported
18-1	Profile Sound Transmission	Supported
19-1	Fittings Origin	European fitting System
20-1	Fittings Security	Anti Burgling System
21-1	Fittings Options	Support all Fitting Range
22-1	Profiles Compounds specs.	Severe Climate Conditions Formula
23-1	Production Origin	Produced by ASAS International for severe climate conditions for Track

Track Profiles Technical Specs		
Serial	Profile Specs.	Description
B : Slide Profile System:		
1-2	External Wall Thickness	2.8 mm - 3 mm
2-2	Inner Wall Thickness	1.25 mm - 1.5 mm
3-2	Number of Vertical Chambers	3 Chambers
4-2	Side Frame Dimensions	Width = 13.7 - 74 mm - Height = 56 mm
5-2	Side Frame Option	Double Track & Triple Track + Fly Net Frame Rail (Optional)
6-2	Side Sash Dimensions	Width = 52 mm - Height = 93 - 75 mm
7-2	Side Mullion Dimensions	Width = 52 mm - Height = 70 mm
8-2	Glass Beads Design	Decorative Beads Support Glass Thickness 24-4 mm
9-2	Glass Beads Gaskets	Built in Gaskets for White & Ivory. External EPDM for Laminated profiles.
10-2	Standard Architrave	Decorative Total 52 mm - Over lap 45mm
11-2	Gaskets	EPDM - External
12-2	Steel reinforcement	Galvanized 1.25 mm - 2 mm
13-2	Dust Stoppers	Supported double with ripped Brush
14-2	Brushes	Double Brush for Sashes 7*7 mm
15-2	Slide Interlock Lap Profiles	Clip-on & Supported with Brushes & EPDM
16-2	Supplementary Profiles	Supported with Full range
17-2	Coupling Profiles	Supported with Full range
18-2	Fly Net System	Supported
19-2	Fly Net Frame Dimensions	Width = 45 mm - Height = 43 mm
20-2	Fly Net Sash Dimensions	Width = 30 mm - Height = 58 mm
21-2	Fly Net Mullion Dimensions	Width = 30 mm - Height = 50 mm
22-2	Fittings Origin	European fitting System
23-2	Fittings Security	Anti Burgling System
24-2	Profiles Compounds specs.	Severe Climate Conditions Formula
25-2	Production Origin	Produced by ASAS International for severe climate conditions for Track

Our

Color Palette


Color your life & Choose from Popular Colors, Woodgrain Finishes to Give a Natural Wood Appearance.



OFF WHITE



DARK OAK



WHITE



GOLDEN OAK



RUSTIC



MAHOGANY

Different Shapes

Provide Systems That Given To You Absolute Flex-ibility for closing and Opening Of Doors and Windows



TURN TILT



TURN



TILT SLIDE



SLIDING



FOLDING



Head Quarter:

Alte Marktoberdorf St. 14 - 87616 Marktoberdorf, Germany

5th Settlement:

Downtown Mall, Store no. 43 S1 , First Floor

6 October City:

Mall of Arabia, HC Furniture Zone, Unit no. F11

Obour City:

Oraby, Ismailia Highway, St. 7, Gate 2 Cario, Egypt



(+20) 1001711155



info@trackgmbh.com



www.trackgmbh.com

